

Handheld Turns Ratio & Winding Resistance Tester **TWR-H**

- Unique handheld instrument on the market.
- Performs 3 different tests – turns ratio, winding resistance, and demagnetization.
- Single-phase test voltage up to 40 V AC
- Two DC current sources.
- Test current up to 2 A DC for transformer HV side.
- Test current up to 10 A DC for transformer LV side.
- Extremely lightweight – only 1.4 kg / 3.1 lbs
- Battery-powered



Description

TWR-H is a handheld, battery operated, fully automatic test set specially designed for turns ratio, phase shift, excitation current and winding resistance measurements of transformers. It can also perform demagnetization of these transformers. Transformer turns ratio is determined by applying AC voltage across high voltage winding, accurately measuring AC voltage across the corresponding unloaded transformer winding, and then displaying the ratio of these voltages. User can enter a transformer's nameplate voltages, so that turns ratio deviation can be

calculated. This feature eliminates any error otherwise caused by an operator's manual calculation. TWR-H compares measured turns ratio with the nameplate ratio and prints out the % of error for each test. Transformer winding resistance is determined by injecting DC current through a winding, accurately measuring DC voltage across the winding, and then calculating resistance as the ratio of voltage and current. The device generates true DC ripple-free currents. Both the injection of the current and the discharge of energy from transformer magnetic circuit are automatically regulated.


Application

The list of instrument application includes:

- Winding resistance measurement
- Turns ratio measurement
- Turns ratio deviation calculation
- Excitation current measurement
- Phase angle measurement
- Demagnetization

Connecting TWR-H to Test Object

Using two sets of cables, TWR-H can be connected to one phase at transformer HV side, and one phase at transformer LV side, simultaneously. Connecting to both sides is necessary for turns ratio measurement. For winding resistance measurement, TWR-H can be connected to either transformer HV side or LV side, or to both of them in case when HV and LV winding resistances are going to be measured simultaneously.

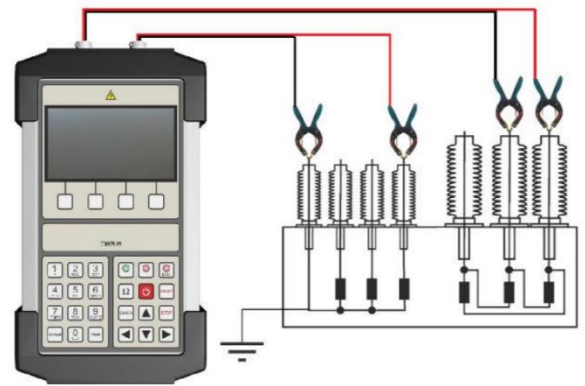

Connecting TWR-H to a three-phase distribution transformer

Benefits and Features

Two Output DC Sources

A common issue when testing winding resistance of distribution transformers is the selection of test current. Distribution transformers have high turns ratio, and therefore high difference between rated HV and LV currents. Testing HV and LV winding simultaneously with the same current source can be challenging – test current must be less than or equal to 10% of the HV rated current, which is very often too low for LV winding. For this reason, TWR-H has two output DC sources – one for transformer HV side, and the other for transformer LV side. This way, transformer HV and LV windings can be tested simultaneously using different test currents.

Multiple Tests

Built-in AC and two output DC sources enable performing multiple tests on a same transformer – winding resistance, demagnetization, turns ratio, excitation current, and phase angle – with a single cable and test setup.

Internal Battery

TWR-H is powered by internal Li-Ion battery. Up to 100 tests can be performed with fully charged battery.

Memory

TWR-H has internal SD card of 8 GB memory space. This enables saving tens of thousands of results.

DV-Win Software

All results from TWR-H internal memory can be easily transferred to a DV-Win software via Bluetooth communication. This allows user to analyze results in the office, to print them, or to create customized test reports. The software is included in the purchase price.

Technical Data

Battery

- Type: Li-Ion, 14.8 V, 2.9 Ah
- Rechargeable
- User replaceable

Power Supply Adapter

- Input voltage: 90 – 264 V AC, 50/60 Hz
- Output voltage: 12-19 V DC
- Output current: 2 A DC

Output AC Source

- Voltage: Up to 40 V AC

Output DC Source 1

- Current: up to 2 A DC
- Voltage: up to 18 V DC

Output DC Source 2

- Current: up to 10 A DC
- Voltage: up to 18 V DC

Turns Ratio Measurement

- Measurement range: 0.8 – 20 000
- Resolution: 5 digits
- Typical accuracy:

@40V AC

0.8 – 999: ±0.05%

1 000 – 3 999: ±0.1%

4 000 – 14 999: ±0.2%

15 000 – 20 000: ±0.3%

@10 V AC

0.8 – 999: ±0.05%

1 000 – 3 999: ±0.1%

4 000 – 15 000: ±0.2%

@1 V AC

0.8 – 999: ±0.05%

1 000 – 4 000: ±0.1%

Excitation Current Measurement

- Measurement range: 0 – 500 mA
- Range / resolution:
 - 0.0000 – 9.9999 mA 0.1 μ A
 - 10.000 – 99.999 mA 1 μ A
 - 100.00 – 500.00 mA 10 μ A
- Typical accuracy: $\pm(0.25\% \text{ rdg} + 0.5 \text{ mA})$

Phase Angle Measurement

- Measurement range: 0 – 360°
- Resolution: 0.01°
- Typical accuracy: $\pm 0.05^\circ$

Winding Resistance Measurement

- Measurement range: 0.1 $\mu\Omega$ – 3 k Ω
- Range / resolution:
 - 0.1 $\mu\Omega$ – 999.9 $\mu\Omega$ 0.1 $\mu\Omega$
 - 1.000 m Ω – 9.999 m Ω 1 $\mu\Omega$
 - 10.00 m Ω – 99.99 m Ω 10 $\mu\Omega$
 - 100.0 m Ω – 999.9 m Ω 0.1 m Ω
 - 1.000 Ω – 9.999 Ω 1 m Ω
 - 10.00 Ω – 99.99 Ω 10 m Ω
 - 100.0 Ω – 999.9 Ω 0.1 Ω
 - 1.000 k Ω – 3.000 k Ω 1 Ω
- Typical accuracy: $\pm(0.1\% \text{ rdg} + 0.1\% \text{ FS})$

Display

- LCD 4.8" display, 240 x 128 pixels Interface
- Bluetooth Internal Memory
- SD card 8 GB Warranty
- 3 years

Environmental Conditions

- Operating temperature:
-10 °C – +55 °C / +14 °F – +131 °F
- Storage & transportation:
-40 °C – +70°C / -40 °F – +158 °F
- Humidity: 5% – 95% relative humidity,
non condensing

Dimensions and Weight

- Dimensions (W x H x D):
170 x 310 x 58 mm / 6.69 x 12.21 x 2.28 in
- Weight: 1.4 kg / 3.1 lbs

Applicable Standards

- Installation/Overvoltage category: II
- Pollution degree: 2
- Safety: LVD 2014/35/EU (CE Conform)
Standard EN 61010-1:2010
- EMC:
Directive 2014/30/EU (CE Conform)
Standard EN 61326-1:2013

All specifications herein are valid at ambient temperature of +25 °C / +77 °F and recommended accessories.

Specifications are subject to change without notice.



H winding current and sense cables
with TTA clamps



X winding current and sense cables
with TTA clamps



Jumper cable with TTA clamp



Cable bag



Test shunt



TRTC Verification Calibrator

