

RMO-A Series

Micro Ohmmeters



Amperis Products S.L.

Barbeito Maria 14, 27003, Lugo, Spain

T (+34) 982 20 99 20 | F (+34) 982 20 99 | info@amperis.com

amperis

RMO-A series

Micro Ohmmeters

- Lightweight – from 7 to 8 kg / 15.4 to 17.5 lbs
- Powerful – from 0 to 600 A DC
- Measuring range 0 – 999,9 mΩ (up to 6 Ω)
- Resolution 0,1 μΩ
- Typical accuracy ± (0,1 % rdg + 0,1 % FS)
- *SINGLE / CONTIN / DTRtest* modes
- Mechanical protection IP50



Description

RMO-A series of Micro Ohmmeters (hereafter referred to as "RMO-A") contain 6 models: **RMO100A, RMO200A, RMO300A, RMO400A, RMO500A and RMO600A.**

All RMO-A models are based on a state of the art technology, using the most advanced switch mode technique available today. The main difference between these models is the maximum test current that can be generated (100 A for RMO100A, 200 A for RMO200A, up to 600 A for RMO600A model).

RMO-A generates a true DC ripple-free current with automatically regulated test ramps. During a test the RMO-A ramps with increasing current before measuring and decreasing current after the measurement. This significantly decreases magnetic transients.

The RMO-A instrument can store internally up to 500 measurements. All measurements are time and date stamped. Using the DV-Win soft-ware a test can be performed from a user's PC, and the results can be obtained directly on the PC.

Communication between the RMO-A and a PC is through an USB (as standard) or an RS232 cable (as an option). Bluetooth communication interface is also available as an option.

Using the DV-Win the result can be arranged as an Excel spread-sheet which can be later shown as a diagram and printed for a report.

The set is equipped with a thermal and an overcurrent protection. The RMO-A has a very high ability to cancel electrostatic and electro-magnetic interference in HV electric fields. It is achieved by very efficient filtration. The filtration is made utilizing a proprietary hardware and software.


The RMO-A instrument has three separate test modes:

- SINGLE mode
- CONTIN mode
- DTRtest mode

Single Test

The RMO-A instrument generates a filtered (true ripple-free) DC current and output it in an automatically regulated current ramp. By sloping the current up and down, magnetic transients are virtually eliminated.

Below is an example of single test ramp for the 100 A current.

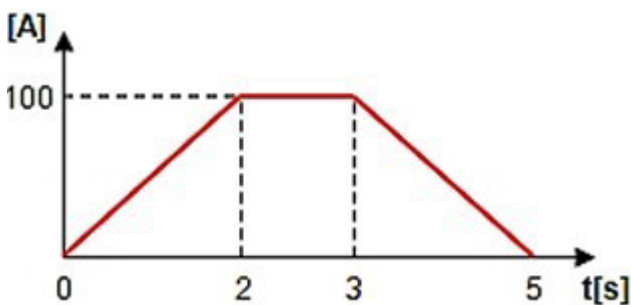

Continuous Test

RMO-A can generate DC current continuously in predefined test durations, as presented in the table below.

Continuous Test

Test current (A)	Maximum duration	Rest time (min)
Up to 100 A	Continuous	0
200 A	150 s	2,5 min
300 A	90 or 150 s	3 or 15 min
400 A	50 s	2,5 min
500 A	30 s	2 min
600 A	20 s	2 min

**test duration at 100 A: test current can be up to 30 minutes depending on the request)*

To avoid overheating, certain duty cycles are applied depending on the test current being used.

DTRtest

Presence of current transformers (CT) on the dead tank circuit breakers may introduce errors during contact resistance measurement due to CT magnetizing process. For this reason, it is necessary to saturate a CT prior to measurement.

DTRtest menu is specially designed for resistance measurement of the dead tank circuit breakers.

All calculations for detecting the saturated condition of CTs are done by internal algorithm. Accordingly, the process of measurement parameters setting and testing in this mode is very simple and does not differ much from live tank circuit breaker testing (in SINGLE / CONTIN test modes).


Application

Typical application is measuring resistance of non-inductive test objects:


- High, middle and low voltage circuit breakers (live and dead tank)
- High, middle and low voltage disconnecting switches
- High-current bus bar joints
- Cable splices
- Welding joints
- Fuses

Connecting the Test Object to RMO-A Benefits and features

The connection diagram of our RMO-A devices corresponds to the Kelvin's (four point) measurement principle. The measuring cables from the "Voltage Sense" sockets are attached as close as possible to Rx, and in between the current feeding cables. That way, a resistance of both cables and clamps is almost completely excluded from the resistance measurement.

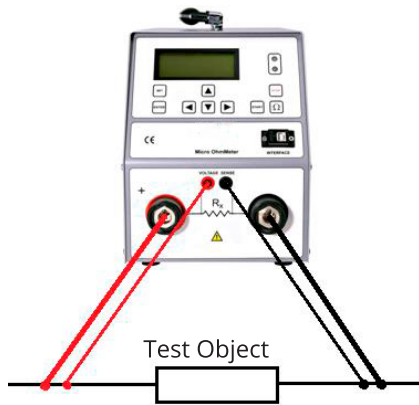

The connecting diagrams for the live tank and dead tank circuit breakers are presented in the figure below:

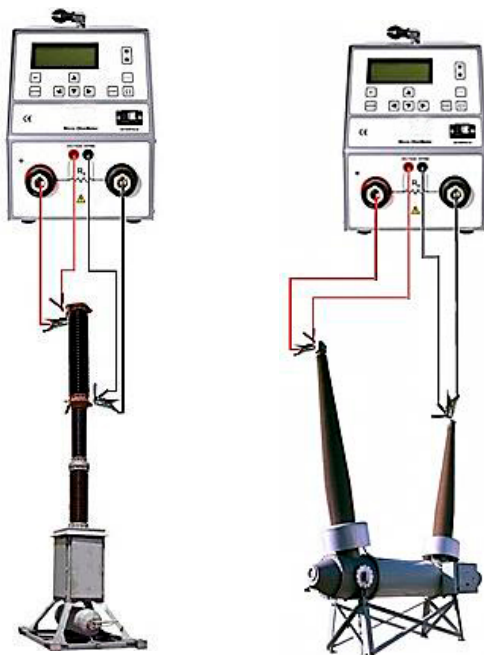

The connecting diagrams for the live tank and dead tank circuit breakers are presented in the figure below:

The main benefits and features of RMO-A devices are listed below:

- Very high output power (output voltage multiplied with output current) enables two main advantages:

1. Wide resistance measurement range even when very high currents are used..

e.g. The RMO600A can test up to 5.3 mΩ with a test current of 600 A when using the 5 m/50 mm² current cables.

2. Use of thinner/longer test cables, depending of the customer requirement..

e.g. RMO100A can use 20 m current cables with cross-section of only 16 mm² for testing circuit breakers with 100 A test current.

- The output current is filtered and has a ripple of less than 1 %.
- The instrument has a very high typical accuracy ± (0,1 % rdg + 0,1 % FS).
- The best resolution of RMO-A is 0,1 μΩ..

Several advanced features are available as standard/ optional accessories:

- Rmax feature (*pass/fail criteria, enabled with the device and the DV-Win software*)
- Built-in thermal printer (*optional accessory*)
- USB / RS232 communication port
- Bluetooth communication (optional)
- TRtest mode (*a special mode for Dead Tank circuit breakers testing*).

DV-Win Software


DV-Win software provides acquisition and analysis of the test results, as well as control of all the RMO functions from a PC. The DV-Win also provides several advanced features as a supplement to multiple functions of RMO devices. Testing in Continuous mode is upgraded with a sample time feature which allows user to record test results in specific time intervals set in seconds.

After performed measurements results can be saved in a various formats and test report can be generated and saved or printed. Result can also be downloaded from the device to the PC by use of several different search filters.

For the RMO form of DV-Win software there is Help menu available, with detailed instructions and explanations of all functions and features.

DV-Win Main Features

- Full control of the device in test
- Test reports *available in several formats
- Several filters for results download to PC
- Test plans
- Sampling time feature for CONTIN mode

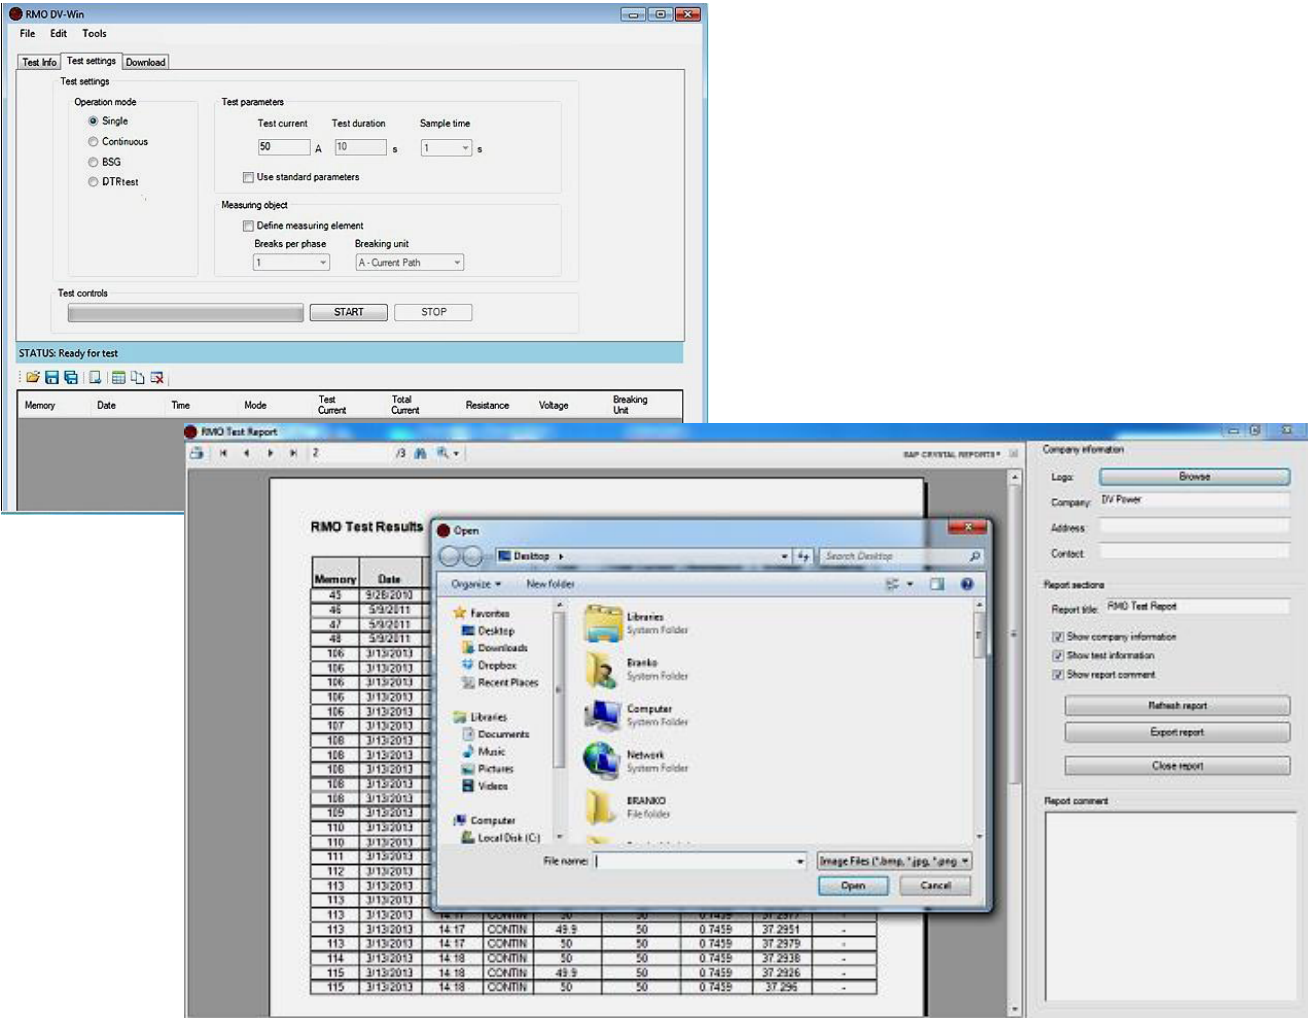

Technical data

Mains power supply

- Connection according to IEC/EN60320-1; C320
- Mains supply: 90 V – 264 V AC
- Frequency: 50 / 60 Hz
- Power consumption

Modelo	@ 230 V CA	@ 115 V CA
RMO100A	1210 VA	1150 VA
RMO200A	1890 VA	1880 VA
RMO300A	2360 VA	2170 VA
RMO400A	3520 VA	2650 VA
RMO500A	3930 VA	3850 VA
RMO600A	4560 VA	4040 VA

Fuse:	Type F
RMO100A & RMO200A	12 A / 250 V
RMO300A & RMO400A	15 A / 250 V
RMO500A & RMO600A	20 A / 250 V

Output data

- Test current ranges (from 0 to I_{max}) and load intervals at I_{max}:

Model	Max. current	Test duration
RMO100A	100 A	Continuous
RMO200A	200 A	Up to 150 s
RMO300A	300 A	Up to 150 s
RMO400A	400 A	60 s @300 A
RMO500A	500 A	Up to 30 s
RMO600A	600 A	Up to 20 s

- Open circuit voltage: 9 V DC ± 2%
- Full Load Voltages at maximum current

Model	@ 230 V CA	@ 115 V CA
RMO100A	7,25 VA	6,90 V
RMO200A	7,10 VA	6,10 V
RMO300A	5,90 VA	4,70 V
RMO400A	6,60 VA	4,30 V
RMO500A	5,90 VA	5,00 V
RMO600A	5,70 V @600 A 7,2 V @300 A	3,70 V

Measurement

- Resistance range: 0,1 μΩ – 999,9 mΩ*
*expandable from 0 Ω up to 6 Ω
- Resolution

0,1 μΩ - 999,9 μΩ	0,1 μΩ
1,000 mΩ - 9,999 mΩ	1 μΩ
10,00 mΩ - 99,99 mΩ	10 μΩ
100,0 mΩ - 999,9 mΩ	0,1 mΩ
*1,000 Ω – 6,000 Ω	1 mΩ

- Typical accuracy ± (0,1 % rdg + 0,1 % FS)

Display

- LCD screen 20 characters by 4 lines;
- LCD display with backlight, visible in bright sunlight..

Interface

- RMO-A is equipped with an USB port
- optional: RS232 (connection to an external computer)
- optional: Bluetooth communication interfaceth

Test Result Storage

- RMO-A can store up to 500 measurements

Printer (optional)

- Thermal printer
- Paper width 80 mm / 3.2 in
- *NOTE*
The print density is guaranteed within the range 5°C to 40°C, 20 to 85% relative humidity, no condensation.
The printer can operate from 0°C to 50°C..

Dimensions and weight

Model	Dimensions (WxHxD) mm	Weight
RMO100A	198 x 255 x 380	7 kg / 15.4 lbs
RMO200A	198 x 255 x 380	7 kg / 15.4 lbs
RMO300A	7.8 x 10 x 15	7,5 kg / 16.5 lbs
RMO400A	7.8 x 10 x 15	7,5 kg / 16.5 lbs
RMO500A	7.8 x 10 x 15	8 kg / 17.5 lbs
RMO600A	7.8 x 10 x 15	8 kg / 17.5 lbs

Environmental protection

- Ingress protection rating: IP50

Environmental conditions

- Operating temperature:
-10 °C - + 55 °C / 14 °F - +131 °F
- Storage & transportation:
40 °C - + 70 °C / -40 °F - +158 °F

Humidity 5 % - 95 % relative humidity, non-condensing

Applicable Standards

- Installation/overvoltage: category II
- Pollution: degree 2
- Safety:
Directive 2014/35/EU (CE conform)
Applicable standards, for a class I instrument, pollution degree 2, Installation category II: IEC EN 61010-1
- EMC: Directive 2014/30/EU (CE conform),
Applicable standard: EN 61326-1
Directive 2004/108/EC
- AN/CSA-C22.2 No. 61010-1, 2nd edition,
including Amendment 1

Warranty

- 3 years

All specifications contained herein are valid at an ambient temperature of + 25 °C and with recommended accessories..

Specifications are subject to change without notice

Accessories



Current cables



Extension current cables



Voltage sense cables



Test shunt



Transport case



Cable bag

* Besides battery clamps, current cables are also available with C clamps or with alligator clamps (as option)

** Besides semi-isolated alligator (A1) clamps, sense cables are also available with isolated alligator (A2) clamps or with TTA clamps (as option)

Recommended cross-sections of the current cables for RMO-A models:

CROSS SECTION/ LENGHT	16 mm ²	25 mm ²	*35 mm ²	50 mm ²	70 mm ²
5 m	RMO100A	RMO200A	RMO300A & RMO400A	RMO500A & RMO600A	-
10 m	RMO100A	RMO200A	RMO300A & RMO400A	RMO500A & RMO600A	-
15 m	-	RMO100A	RMO200A	RMO300A & RMO400A	RMO500A & RMO600A

*RMO500A and RMO600A devices can be provided with 2 x 5 m / 35 mm² cables also

Order Info

Instrument with included accessories	Article No.
Micro Ohmmeters RMO-A - DV-Win PC software including USB cable - Mains power cable - Ground (PE) cable	RMO100A-N-00
	RMO200A-N-00
	RMO300A-N-00
	RMO400A-N-00
	RMO500A-N-00
	RMO600A-N-00

Recommended accessories	Article No.
Current cables 2 x 5 m, *XX mm ² with battery clips	C2-05-XXYMBY
Sense cables 2 x 5 m with alligator clips	S2-05-02BPA2
Transport case	HARD-CASE-ME

Optional accessories	Article No.
Cable bag	CABLE-BAG-00
Device bag	DEVIC-BAG-00
Test shunt 100 $\mu\Omega$ (600 A/60 mV)	SHUNT-600-MK
Current cables 2 x 10 m, *XX mm ² with battery clips	C2-10-XXYMBY
Current cables 2 x 15 m, *XX mm ² with battery clips	C2-15-XXYMBY
Current extension cable 2 x 10 m, *XX mm ²	E2-10-XXYMYF
Sense cables, extension 2 x 10 m	E2-10-02BPBP
Sense cables 2 x 10 m with alligator clips	S2-10-02BPA2
Sense cables 2 x 15 m with alligator clips	S2-15-02BPA2
Bluetooth communication module	BLUET-MOD-00
Built-in thermal printer	PRINT-080-00

*XX - Cross-section of current cables varies, depending on the output power of the model

**YMBY - For RMO100A and RMO200A: YMBY=LMB1; For other models: YMBY=VMB3

e.g. For RMO500A and RMO600A devices:

- the article number for current cables 2 x 5m/50 mm² is C2-05-50VMB3,
- the article number for current cables 2 x 5m/35 mm² is C2-05-35VMB3.

Amperis Products S.L.

Barbeito Maria 14, 27003, Lugo, Spain
T (+34) 982 20 99 20 | F (+34) 982 20 99
info@amperis.com



www.amperis.com

PROYECTO COFINANCIADO POR EL IGAPE, XUNTA DE GALICIA Y FONDO EUROPEO DE DESARROLLO REGIONAL DEL PROGRAMA OPERATIVO 2014-2020



Xacobeo 2021

