

ARFU-2

SF₆ handling equipment



Evacuation and regulated SF₆ filling in a lightweight, rugged cart, ready for the field

ARFU-2

Gas filling regulation unit ARFU-2 SF₆

amperis

www.amperis.com

 C/ María Barbeito, 14
27003, Lugo, Spain

 **Contact**

T [+34] 982 20 99 20
info@amperis.com | www.amperis.com

Lightweight, rugged unit to evacuate air and moisture and refill SF₆ equipment with standard cylinders.

Product description



Valve and gauge assembly of the ARFU-2

One cart, two operations

The ARFU-2 combines, in a single cart, the evacuation of air and moisture from switchgear and circuit-breaker compartments and the subsequent regulated filling with standard SF₆ cylinders. Its lightweight yet rugged frame and large tires make it easy to move over uneven or gravel surfaces in substations.

One valve, two modes

A 3-way ball valve switches between evacuation and filling with no need to rewire hoses. The permanently mounted vacuum pump reaches a sealed pressure below 0.03 mbar; filling is user-regulated through a pressure regulator, with an integral vacuum gauge to follow the process.

Key advantages

- Single-valve operation to switch between evacuation and filling.
- Large tires for movement over gravel or uneven ground.
- High-capacity vacuum pump, permanently mounted on the cart.
- Regulated gas filling, adjustable by the user.
- Integral vacuum gauge on the control panel.
- Supplied with 3 m hoses and a power cable.




C/ María Barbeito, 14
27003, Lugo, Spain

✉ Contact

+T [+34] 982 20 99 20
info@amperis.com | www.amperis.com

Applications and operation

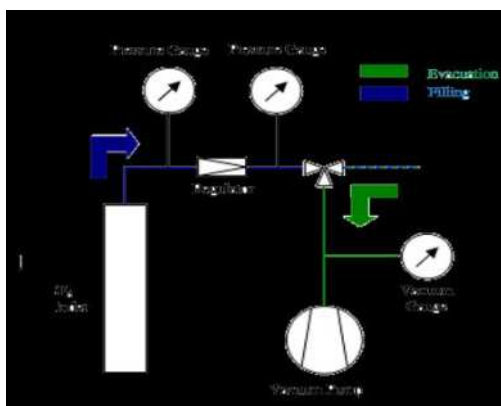

Evacuation and filling process diagram of the ARFU-2

Applications

- Evacuation of air and moisture prior to filling SF₆ equipment.
- Regulated filling of switchgear and circuit-breaker compartments with SF₆.
- Field commissioning and maintenance of gas-insulated equipment.
- Monitoring of vacuum and filling pressure through integral gauges.

How it works

The process runs in two stages linked by the same 3-way valve: the compartment is first evacuated with the vacuum pump until free of air and moisture; the same valve then connects the SF₆ cylinder to the equipment through the pressure regulator, which controls the filling pressure while the vacuum gauge is used to follow each stage.

Options

- Special supply voltages on request.
- Longer hoses for hard-to-reach installations.



C/ María Barbeito, 14
27003, Lugo, Spain

Contact

+T [+34] 982 20 99 20
info@amperis.com | www.amperis.com

ARFU-2 – PERFORMANCE DATA

Vacuum pump	10 CFM (17 m ³ /h)
Sealed vacuum	Below 0.03 mbar
Valve	3-way ball valve, to switch between evacuation and filling
Filling	User-regulated through pressure regulator

Performance data as per the manufacturer's current catalogue (2025).



C/ María Barbeito, 14
27003, Lugo, Spain



Contact

+T [+34] 982 20 99 20
info@amperis.com | www.amperis.com

ARFU-2 – TECHNICAL SPECIFICATIONS

Type	Portable SF ₆ evacuation and regulated filling unit, on a wheeled cart
Frame	Lightweight and rugged, with large-diameter tires
Indicator	Integral vacuum gauge
Hoses	3 m, supplied with power cable
Power supply	120 V single-phase, 60 Hz / 220 V single-phase, 50/60 Hz (other voltages on request)
Dimensions (H × W × D)	1500 × 600 × 400 mm
Weight	31 kg



C/ María Barbeito, 14
27003, Lugo, Spain

Contact

+T [+34] 982 20 99 20
info@amperis.com | www.amperis.com