

RMO-TD Series

Tap Changer Analyzer & Winding Ohmmeter



Amperis Products S.L.

Barbeito Maria 14, 27003, Lugo, Spain

T (+34) 982 20 99 20 | F (+34) 982 20 99 | info@amperis.com

amperis

RMO-TD Series

Tap Changer Analyzer & Winding Ohmmeter

- On-load tap changer dynamic resistance measurement
- Three resistance measurement channels
- One temperature measurement channel
- Automatic resistance measurement
- Heat Run test
- Rapid automatic demagnetization
- Tap changer motor current monitoring channel
- Automatic discharge circuit
- Built-in tap changer control unit
- Three models: RMO25TD, RMO40TD, RMO60TD



Description


The Tap Changer Analyzer & Winding Ohmmeter of the RMO-TD series is designed for winding resistance measurement of inductive objects, and for a tap changer analysis. The RMO-TD series is based on the state of the art technology, using the most advanced switch mode technology available today. The RMO-TD series is accurate (0,1_%), powerful (up to 60 A) and lightweight. It generates a true DC ripple free current with automatically regulated measurement and discharging circuit.

RMO-TD series can perform a simple, quick and reliable transformer on-load tap changer condition assessment. This series enables measurements of a winding resistance in every tap position, current ripple values (percentage of a current drop during a tap change) and transition times during the tap changes. Problems with a connection, contacts, and selector/diverter switch operation (tap change with interruption) can be detected with these measurements.

Application

The list of the instrument application includes:

- Three-channel winding resistance measurement, which enables simultaneous winding resistance measurement of up to three windings on a single phase
- Dynamic resistance measurement (DVtest) of on-load tap changers, performed on a single phase
- A measurement of on-load tap changer motor current by using a dedicated channel
- Heat Run test, which enables obtaining the Hot Spot temperature along with resistance graph during the cooling process
- A single-phase automatic transformer demagnetization

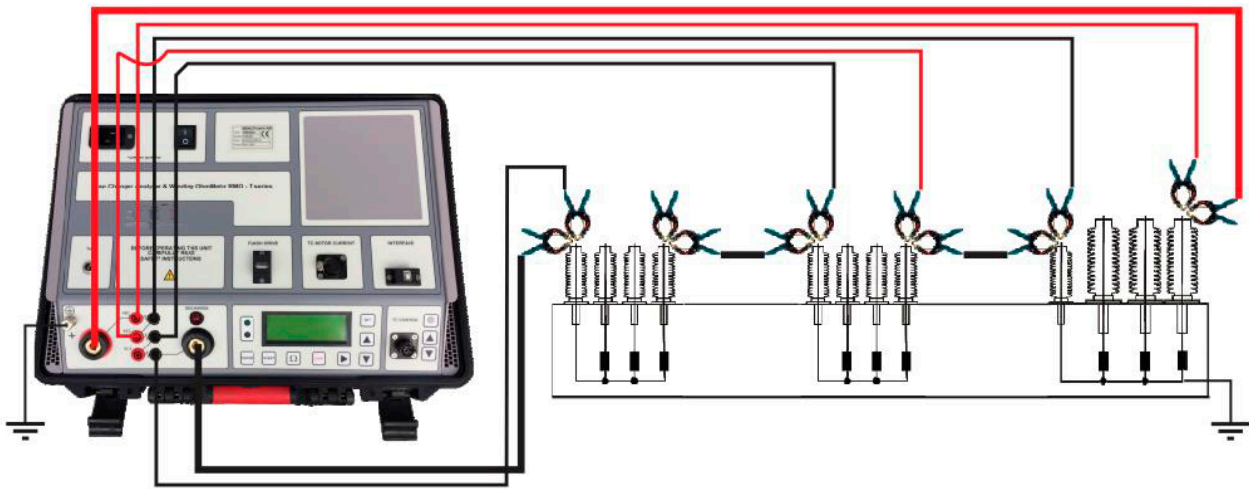

Connecting the RMO-TD to a Transformer

The RMO-TD has three separate resistance measurement channels, which enable simultaneous measurement of the primary and secondary winding on the same phase. This significantly speeds up the measurement and reduces the total transformer testing time. At the same time, by saturating the magnetic core through the HV and LV windings the stabilization time and subsequently the total testing time is reduced even more.



Simultaneous Three-Channel Winding Resistance Measurement


The RMO-TD injects the current with a voltage value as high as 55 V. This ensures that the magnetic core is saturated quickly and duration of the test is as short as possible. The three independent channels enable simultaneous testing of three windings in series – primary, secondary and tertiary windings. There is enough memory within the RMO-TD instrument to store 1 000 measurements. All measurements are time and date stamped.

The instrument is equipped with thermal and overcurrent protection. The RMO-TD has very high ability to cancel electrostatic and electromagnetic interference that exists in HV electric fields. It is achieved by a proprietary filtration solution applied to both, the hardware construction and the application software implementation.

On Load Tap Changers – Dynamic Resistance Measurement (DV test)

The RMO-TD can be used to measure the winding resistance of the individual taps of a power transformer without discharging between the tests.

The unit also checks whether the on-load tap changer (OLTC) switches without an interruption. The moment a tap position is changed from one tap to another, the device detects a sudden, very short drop of the test current. These drops called “Ripple” should be consistent, where any drop out-of-line should be investigated. Tap changer malfunctions can be detected by analyzing the measurements of transition ripple, transition time, and visualizing DRM graphs. In addition, the tap changer motor current is recorded, and displayed on the same graph. The built-in tap changer control unit enables remote control of the tap changer operation from the instrument’s keyboard.

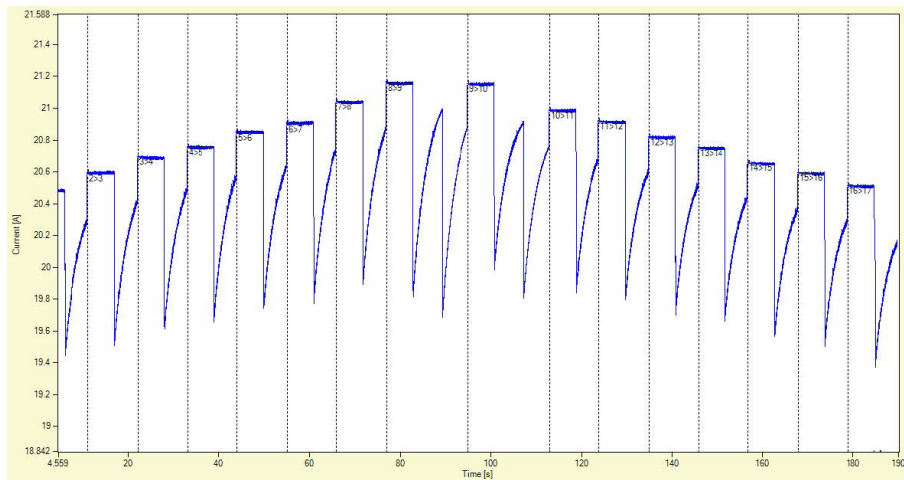

Technical data

Winding Resistance Measurement

- Test currents:
5 mA – 25 A DC for RMO25TD
5 mA – 40 A DC for RMO40TD
5 mA – 60 A DC for RMO60TD
- Output voltage: up to 55 V DC
- Measurement range: 0,1 $\mu\Omega$ - 10 k Ω
- Typical accuracy
 $\pm(0,1\% \text{ rdg} + 0,1\% \text{ F.S.})$ for 0,1 $\mu\Omega$ -1,999 k Ω range
 $\pm(0,2\% \text{ rdg} + 0,1\% \text{ F.S.})$ for 2 k Ω - 10 k Ω range

Resolution

- 0,1 $\mu\Omega$ – 999,9 $\mu\Omega$: 0,1 $\mu\Omega$
- 1,000 m Ω – 9,999 m Ω : 1 $\mu\Omega$
- 10,00 m Ω – 99,99 m Ω : 10 $\mu\Omega$
- 100,0 m Ω – 999,9 m Ω : 0,1 m Ω
- 1,000 Ω – 9,999 Ω : 1 m Ω
- 10,00 Ω - 99,99 Ω : 10 m Ω
- 100,0 Ω – 999,9 Ω : 0,1 Ω
- 1,000 k Ω – 9,999 k Ω : 1 Ω

Data Storage

- 1 000 internal memory positions
- USB flash drive feature enables storage of a huge number of measurements

Printer (optional)

- Thermal printer
- Paper width 80 mm

Temperature Measurement

- One temperature measurement channel
Thermometer Pt100
-50 °C +180 °C / -58 °F +356 °F
50 mm x 6 mm

OLTC Dynamic Resistance Measurement

- Sampling rate: 0,1 ms
- Automatic open circuit detection and warning
- Transition current ripple measurement
- Transition time measurement using DV-Win software
- Timing measurement of different transition changes using DV-Win graph analysis tool

AC Current Measurement Channel

- Resolution: 0,1 ms
- Amplitude resolution: 16 bit

Current Clamp Meter Specifications

- Measuring range: 30 / 300 A
- Nominal current: 300 A_{RMS} or 450 A DC_{PK}
- Frequency range: DC to 20 kHz (-3 dB)

Computer Interface

- USB
- Optional: RS232

Warranty

- Three years

Environmental Conditions

- Operating temperature:
-10 °C - +55 °C / 14 °F - +131 °F
- Storage & transportation:
40 °C - +70 °C / -40 °F - +158 °F
- Humidity 5 % - 95 % relative humidity, non-condensing

Dimensions and Weight

Device	Weight	Dimensions (WxHxD)
RMO25TD	10,0 kg / 22,0 lbs	480 x 197 x 395 mm 18.9 x 7.8 x 15.6 in
RMO40TD	13.5 kg / 29.8 lbs	480 x 197 x 395 mm 18.9 x 7.8 x 15.6 in
RMO60TD	14,0 kg / 30.8 lbs	480 x 197 x 395 mm 18.9 x 7.8 x 15.6 in

Mains Power Supply

- Connection according to IEC/EN60320-1; UL498, CSA 22.2
- Mains supply: 90 V - 264 V AC
- Frequency: 50 / 60 Hz
- Mains supply voltage fluctuations up to $\pm 10\%$ of the nominal voltage
- Input power: 1 800 VA
- Fuse 15 A / 250 V, type F, not user replaceable

Applicable Standards

- Installation/overvoltage: category II
- Pollution: degree 2
- Low voltage directive:
Directive 2014/35/EU (CE Conform)
Applicable standards, for a class I instrument, pollution degree 2, installation category II: IEC EN 61010-1
- Electromagnetic compatibility:
Directive 2014/30/EU (CE Conform)
Applicable standard EN 61326-1
- CAN/CSA-C22.2 No. 61010-1, 2nd edition, including Amendment 1

All specifications herein are valid at ambient temperature of + 25 °C and recommended accessories. Specifications are subject to change without notice. Specifications are valid if the instrument is used with the recommended set of accessories.

Accessories



Current and Sense cables with TTA clamps



Voltage Sense cables with TTA clamps



Current connection cable with TTA clamps



Cable bag



Cable plastic case



Cable plastic case with wheels



Current clamp 30/300 A with extension 5 m (16.4 ft)



Test shunt

Order info

Instrument with included accessories	Article No.
Tap Changer Analyzers & Winding Ohmmeters RMO-TD	RMOXTT-N-01
DV-Win PC software including USB cable	
Built-in Tap Changer Control Unit	
Tap Changer Control cable 5 m (16.4 ft)	
Mains Power cable	
Ground (PE) cable	
Transport case	

Recommend	Article No.
Current cables 2 x 10 m 10 mm ² (32.8 ft, 7 AWG) and Sense cables 2 x 10 m (32.8 ft) with TTA clamps	CS-10-10LMXC
Sense cables 2 x 10 m (32.8 ft) with TTA clamps	S2-10-02BPWC
Current connection cable 1 x 5 m 10 mm ² (16.4 ft, 7 AWG) with TTA clamps	CX-05-102XWC
Cable bag	CABLE-BAG-00
Current clamp 30/300 A supplied from the instrument with extension 5 m (16.4 ft)	CACL-0300-06

Optional	Article No.
Test shunt 150 A / 150 mV	SHUNT-150-MK
Thermal printer 80 mm (3.15 in) (built-in)	PRINT-080-00
Thermal paper roll 80 mm (3.15 in)	PRINT-080-RO
Transport case	HARD-CASE-SC
Plastic transport case	HARD-CASE-PC
Plastic transport case with wheels	HARD-CASE-PW
Current cables 2 x 15 m 10 mm ² (32.8 ft, 7 AWG) and Sense cables 2 x 15 m (49.2 ft) with TTA clamps	CS-15-10LMXC
Current cables 2 x 20 m 16 mm ² (65.6 ft, 5 AWG) and Sense cables 2 x 20 m (65.6 ft) with TTA clamps	CS-20-16LMXC
Sense cables 2 x 15 m (49.2 ft) with TTA clamps	S2-15-02BPWC
Sense cables 2 x 20 m (65.6 ft) with TTA clamps	S2-20-02BPWC
Current cables 2 x 15 m 10 mm ² (49.2 ft, 7 AWG) with TTA clamps	C2-15-10LMWC
Current cables 2 x 20 m 16 mm ² (65.6 ft, 5 AWG) with TTA clamps	C2-20-16LMWC
Current connection cable 1 x 12 m 16 mm ² (39.4 ft, 5 AWG) with TTA clamps	CX-12-162XWC
Cable plastic case – medium size	CABLE-CAS-02
Cable plastic case with wheels - medium size	CABLE-CAS-W2
Cable plastic case – large size	CABLE-CAS-03
Cable plastic case with wheels - large size	CABLE-CAS-W3
Temperature sensor 1 x 50 mm (1.97 in) + 5/10/15 m (16.4/32.8/49.2 ft)	TEMP1-050-XX
Bluetooth communication module	BLUETOOTH-00

Amperis Products S.L.

Barbeito Maria 14, 27003, Lugo, Spain
T (+34) 982 20 99 20 | F (+34) 982 20 99
info@amperis.com

amperis

www.amperis.com

PROYECTO COFINANCIADO POR EL IGAPE, XUNTA DE GALICIA Y FONDO EUROPEO DE DESARROLLO REGIONAL DEL PROGRAMA OPERATIVO 2014-2020



Xacobeo 2021

